





## Braided Stainless Steel XC, Full Coverage On Any Application

Nothing protects hoses from wear and blowout quite like real Stainless Steel braid. It looks great in any application and is as strong as, well, steel. Custom hoses overbraided with stainless steel are expensive, selections are often limited, and production and delivery times can be an issue.

Our new full coverage Stainless Steel sleeving, FLEXO® STAINLESS XC (SSL), provides the same look and protection as custom built SS hoses at a fraction of the cost. Braided from 304 Stainless Steel filaments, Flexo® SS XC resists all common automotive chemicals, salt water, and it won't discolor or rust while providing an extreme level of abrasion protection on any application.

- **Virtually Indestructible 304 Stainless Steel XC**
- **Won't Discolor or Rust**
- **Cuts with Shears or Serrated Scissors**
- **Improves Burst Strength of Hoses**

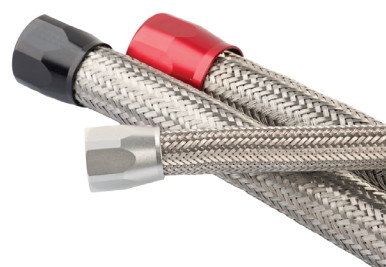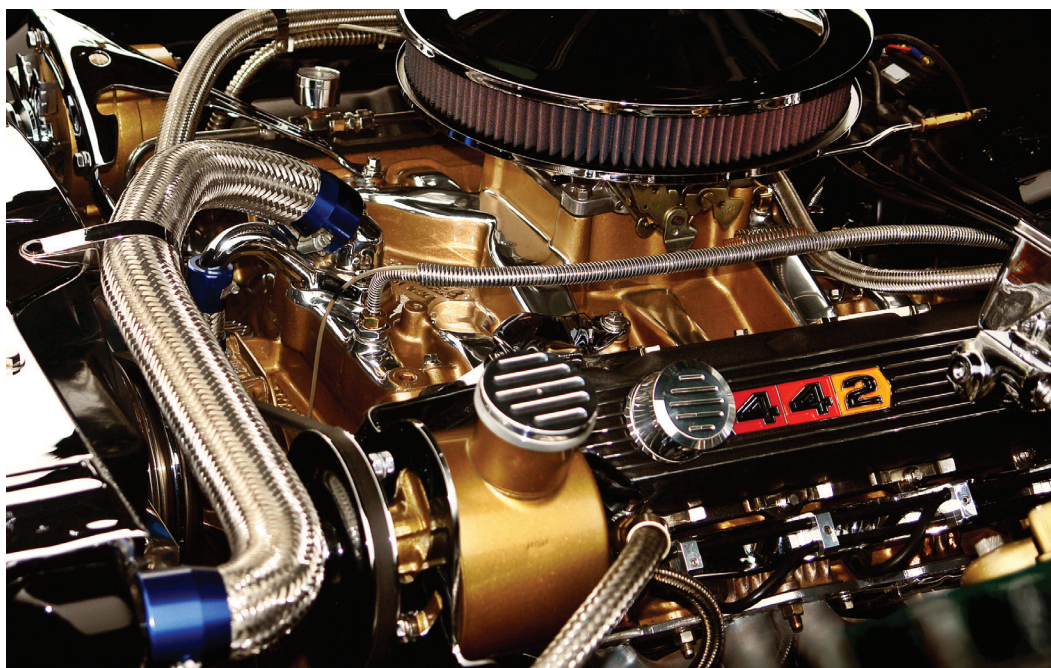

Stainless Steel XC gives full coverage on any application and slides onto hoses for that custom look.



Besides extreme toughness, braided Stainless Steel XC makes a decisive design statement, as in this line of high-end writing instruments from Porsche Design.

| Nominal Size | Part #    | Wall Thickness | Expansion Range |         | Standard Spool Put-Ups |            | Available Colors | Lbs/100' |
|--------------|-----------|----------------|-----------------|---------|------------------------|------------|------------------|----------|
|              |           |                | Min.            | Max.    | Bulk Spool             | Shop Spool |                  |          |
| 1/16"        | SSL.06SV  | .013"          | 1/16"           | 1/16"   | 250'                   | 100'       | Silver (SV)      | 0.30     |
| 1/8"         | SSL0.13SV | .013"          | 1/16"           | 11/32"  | 250'                   | 100'       | Silver (SV)      | 1.20     |
| 1/4"         | SSL0.25SV | .013"          | 3/16"           | 13/32"  | 250'                   | 100'       | Silver (SV)      | 2.20     |
| 3/8"         | SSL0.38SV | .013"          | 1/4"            | 5/8"    | 250'                   | 100'       | Silver (SV)      | 2.54     |
| 1/2"         | SSL0.50SV | .013"          | 3/8"            | 3/4"    | 100'                   | 50'        | Silver (SV)      | 3.15     |
| 3/4"         | SSL0.75SV | .013"          | 1/2"            | 1 1/4"  | 100'                   | 50'        | Silver (SV)      | 6.90     |
| 1"           | SSL1.00SV | .025"          | 5/8"            | 1 5/16" | 100'                   | 50'        | Silver (SV)      | 9.78     |
| 1 1/4"       | SSL1.25SV | .025"          | 3/4"            | 1 3/4"  | 100'                   | 50'        | Silver (SV)      | 13.70    |
| 1 1/2"       | SSL1.50SV | .025"          | 1"              | 2 1/8"  | 100'                   | 50'        | Silver (SV)      | 16.60    |
| 1 3/4"       | SSL1.75SV | 0.055"         | 3/4"            | 2"      | -                      | -          | Silver (SV)      | 19.6     |
| 2 1/4"       | SSL2.25SV | 0.055"         | 7/8"            | 3 1/4"  | -                      | -          | Silver (SV)      | 21.0     |

